

SPA 6 - 4.5 | VRLA Battery



Specifications

Nominal Voltage	6 V		
Number of cells	3		
Design Life	10 years		
Dimensions	Length	70 mm	
	Width	47 mm	
	Height	101 mm	
	Total Height	107 mm	
Approx. Weight	0.65 kg		
Nominal Capacity (25°C)	20 hours rate (0.20 A, 5.25V)	4.00 Ah	
	10 hours rate (0.36 A, 5.25 V)	3.60 Ah	
	5 hours rate (0.65 A, 5.25 V)	3.25 Ah	
	1 hour rate (2.47 A, 4.80 V)	2.47 Ah	
Max. Discharge Current (25°C)	60 A (5s)		
Max. Charging Current (25°C)	1.2 A		
Internal Resistance	30 mOhms		
Fully Charged battery (25°C)			
Self-Discharge (25°C)	3% of capacity declined per month (average)		
Operating Temperature Range	Discharge	-15~50°C	
	Charge	-10~50°C	
	Storage	-20~50°C	
Short Circuit Current	210 A		
Charging Characteristics (25°C)	Boost charging voltage	2.40-2.45 Vpc	
	Temperature compensation	-30 mV/°C	
	Float charging voltage	2.25-2.30 Vpc	
	Temperature compensation	-18 mV/°C	


Applications

- Uninterruptible Power Supplies (UPS)
- Electric Power Systems (EPS)
- Emergency backup power supplies
- Electronic apparatus and equipment
- Communication power supplies
- DC power supplies
- Auto control system

Battery Construction

Component	Positive Plate	Negative Plate	Container	Cover	Safety Valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

Dimensions

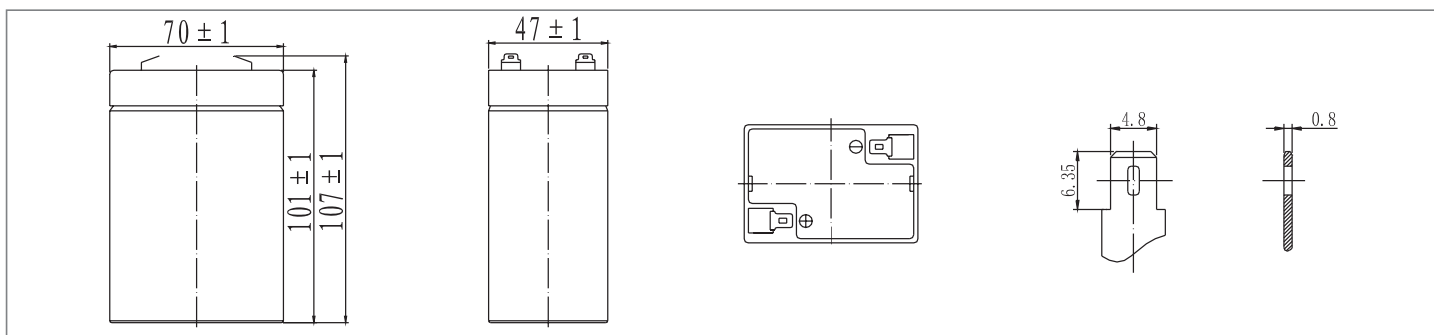

Constant Current Discharge (Amperes) at 25°C

End Voltage (Volts/Cell)	5 min	10 min	15 min	30 min	1 h	2 h	3 h	4 h	5 h	8 h	10 h	20 h
1.60 V	14.40	9.12	7.22	4.03	2.47	1.35	0.97	0.78	0.66	0.42	0.36	0.20
1.65 V	14.00	8.85	7.05	3.95	2.43	1.34	0.96	0.77	0.66	0.42	0.36	0.20
1.70 V	13.40	8.48	6.79	3.83	2.37	1.33	0.96	0.77	0.65	0.41	0.36	0.20
1.75 V	12.90	8.12	6.56	3.73	2.32	1.31	0.95	0.76	0.65	0.41	0.36	0.20
1.80 V	12.10	7.66	6.21	3.60	2.25	1.28	0.92	0.74	0.63	0.40	0.35	0.19

Constant Power Discharge (Watts) at 25°C

End Voltage (Volts/Cell)	5 min	10 min	15 min	30 min	1 h	2 h	3 h	4 h	5 h	8 h	10 h	20 h
1.60 V	80.60	51.40	41.20	23.10	14.30	7.90	5.76	4.62	3.93	2.55	2.15	1.16
1.65 V	78.20	49.90	40.20	22.60	14.10	7.85	5.72	4.59	3.91	2.54	2.14	1.15
1.70 V	74.90	47.80	38.70	21.90	13.70	7.78	5.68	4.56	3.88	2.52	2.13	1.15
1.75 V	71.70	45.80	37.40	21.40	13.50	7.66	5.64	4.53	3.86	2.51	2.12	1.14
1.80 V	67.70	43.20	35.40	20.60	13.00	7.47	5.47	4.39	3.74	2.43	2.08	1.12

(Note) The above characteristics data are average values obtained within three charge/discharge cycles.