

SPA 12 - 26 | VRLA Battery



Applications

- Uninterruptible Power Supplies (UPS)
- Electric Power Systems (EPS)
- Emergency backup power supplies
- Electronic apparatus and equipment
- Communication power supplies
- DC power supplies
- Auto control system


Specifications

Nominal Voltage	12 V	
Number of cells	6	
Design Life	10 years	
Dimensions	Length	165 mm
	Width	176 mm
	Height	127 mm
	Total Height	127 mm
Approx. Weight	7.6 kg	
Nominal Capacity (25°C)	20 hours rate (1.30 A, 10.5 V)	26.00 Ah
	10 hours rate (2.44 A, 10.5 V)	24.40 Ah
	5 hours rate (4.16 A, 10.5 V)	20.80 Ah
	1 hour rate (15.80 A, 9.6 V)	15.80 Ah
Max. Discharge Current (25°C)	390 A (5s)	
Max. Charging Current (25°C)	7.8 A	
Internal Resistance	12 mOhms	
Fully Charged battery (25°C)		
Self-Discharge (25°C)	3% of capacity declined per month (average)	
Operating Temperature Range	Discharge	-15~50°C
	Charge	-10~50°C
	Storage	-20~50°C
Short Circuit Current	1020 A	
Charging Characteristics (25°C)	Boost charging voltage	2.40-2.45 Vpc
	Temperature compensation	-30 mV/°C
	Float charging voltage	2.25-2.30 Vpc
	Temperature compensation	-18 mV/°C

Battery Construction

Component	Positive Plate	Negative Plate	Container	Cover	Safety Valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

Dimensions

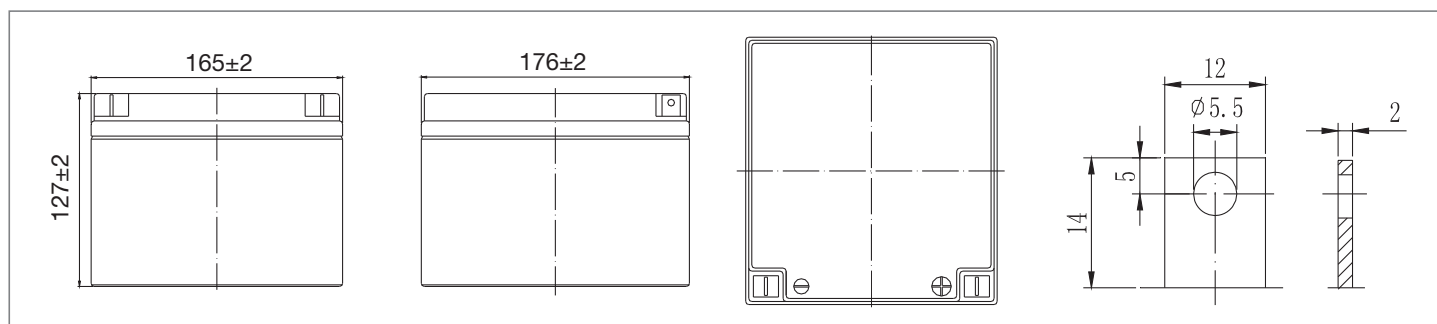

Constant Current Discharge (Amperes) at 25°C

End Voltage (Volts/Cell)	10 min	15 min	30 min	1 h	2 h	3 h	4 h	5 h	8 h	10 h	20 h
1.60 V	58.5	46.3	25.9	15.8	8.79	6.29	4.91	4.24	2.78	2.48	1.32
1.65 V	56.2	45.1	25.4	15.6	8.74	6.25	4.88	4.22	2.77	2.47	1.31
1.70 V	54.3	43.5	24.6	15.2	8.66	6.21	4.84	4.19	2.75	2.46	1.30
1.75 V	51.9	42.0	24.0	14.9	8.53	6.16	4.81	4.16	2.73	2.44	1.30
1.80 V	48.9	39.8	23.1	14.4	8.31	5.98	4.67	4.04	2.65	2.40	1.22

Constant Power Discharge (Watts) at 25°C

End Voltage (Volts/Cell)	10 min	15 min	30 min	1 h	2 h	3 h	4 h	5 h	8 h	10 h	20 h
1.60 V	660	528	297	183	103	74.7	58.4	50.7	33.4	29.8	15.8
1.65 V	634	514	291	181	102	74.2	58.1	50.4	33.2	29.7	15.7
1.70 V	612	496	282	176	101	73.7	57.7	50.0	33.0	29.5	15.6
1.75 V	586	479	275	173	99.8	73.2	57.3	49.7	32.8	29.3	15.6
1.80 V	551	453	265	167	97.2	71.0	55.6	48.2	31.8	28.7	14.7

(Note) The above characteristics data are average values obtained within three charge/discharge cycles.